


# COOL TOUCH™

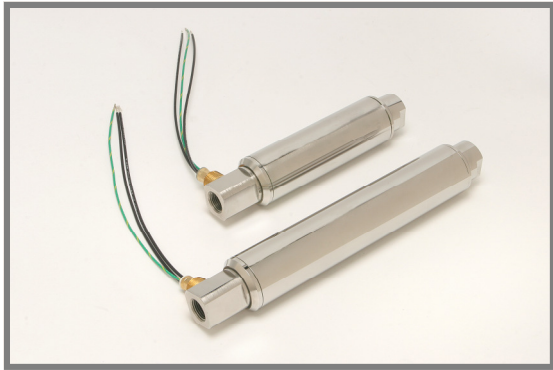

Shown with optional inlet & exhaust fittings

# CT150

- The Cool Touch™ 150 Heat Torch is a robust air heating device designed for high reliability, long life and substantial air flow. In-service applications include staking, curing, drying, heat-shrinking, sterilization, adhesive activation, air scrubbing and air knives.
- The Cool Touch™ 150 Heat Torch heating element is contained in a 2.0" diameter stainless steel pipe. The heater body is 4.70" long for power ratings from 500 to 2500 watts, and 8.31" long for power ratings of 2750 to 5000 watts. The standard power increments are 250 watts and 500 watts, respectively.
- Allowable air flow is from 4.8 to 70 SCFM. Maximum air input temperature is 250°F. Maximum air output temperature is 1300° F.
- The standard inlet fitting is a 1/2" NPT female. Standard outlets include 1/4", 1/2" and 1" NPT female fittings and no exhaust fitting.

### Wattage & Voltage Options

120V, single phase, 0.5kW-2.5kW  
 240V, single phase, 0.5kW-5.0kW  
 240V, three phase, 2.75kW-5kW

### Other Options

Thermocouple Fitting  
 Thermocouple  
 Flexible Conduit

### Fitting Options

**Inlet Fitting:**  
 1/2F- 1/2" FNPT


**Exhaust Fitting:**  
 1/4F- 1/4" FNPT  
 1/2F- 1/2" FNPT  
 1F- 1" FNPT  
 NF- No Fitting

### Specifications

Max. wattage:	5.0kW
Max. exhaust air temp.:	1300°F
Max. inlet air temp.:	250°F
(consult factory for higher inlet temp.)	
Max. SCFM:	70
Pressure Rating:	120 PSIG
Mounting:	Horizontal/Vertical
Leads:	14 gauge (12" long)
Heater Body:	Stainless Steel
Inlet Fitting:	Stainless Steel
Exhaust Fitting:	Stainless Steel

Wattage	Min. SCFM Req.
0.5kW	4.8
1.0kW	4.8
1.5kW	4.8
2.0kW	4.8
2.5kW	5.3
3.0kW	6.6
3.5kW	7.9
4.0kW	9.3
4.5kW	10.8
5.0kW	12.4

Airflow (SCFM)	0.5kW-2.5kW Pressure Drop (psig)	2.75kW-5kW Pressure Drop (psig)
5	1.2	1.6
10	3.1	3.8
20	5.2	7.5
30	8.0	12.0
40	12.0	16.3
50	15.5	21.6
60	19.5	26.8
70	24.0	32.0

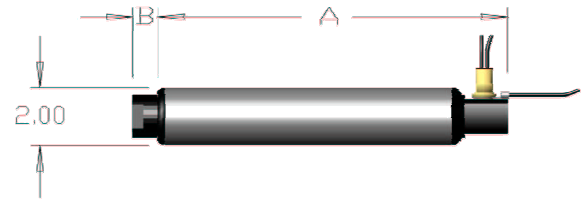

Wattage	Heater Body Dim. A	Exhaust Fitting	Dim. B
0.5kW-2.5kW	8.24	1/4F	0.83
2.75kW-5kW	12.14	1.2F	0.88
		1F	0.87
		NF	0.06

### Part Number Key

CT150	500	120	1	1/2F	1/4F	TF1	(XXX)
Cool Touch 150	Wattage	Voltage	Phase	Inlet Fitting	Exhaust Fitting	Thermocouple Fitting	Modification



www.farnam-custom.com

Ph: (828) 684-3766 • Fax: (828) 684-3768

Revised 2/1/09